


# WELLDANA® PRIVATE SPA

## WELLDANA® SPA UNIT WITH CARTRIDGE FILTER

Welldana® Spa unit for private use. (6 - 8 big jets). For spas up to 1100 l water.

- 1. = Suction from bottom outlet
- 2. = Return to jets.
- 3. = Return to bottom inlet
- 4. = Suction from skimmer
- 5. = Air to air channel

A. = Cartridge filter 6,9 m<sup>2</sup>  
B. = Chlorinator

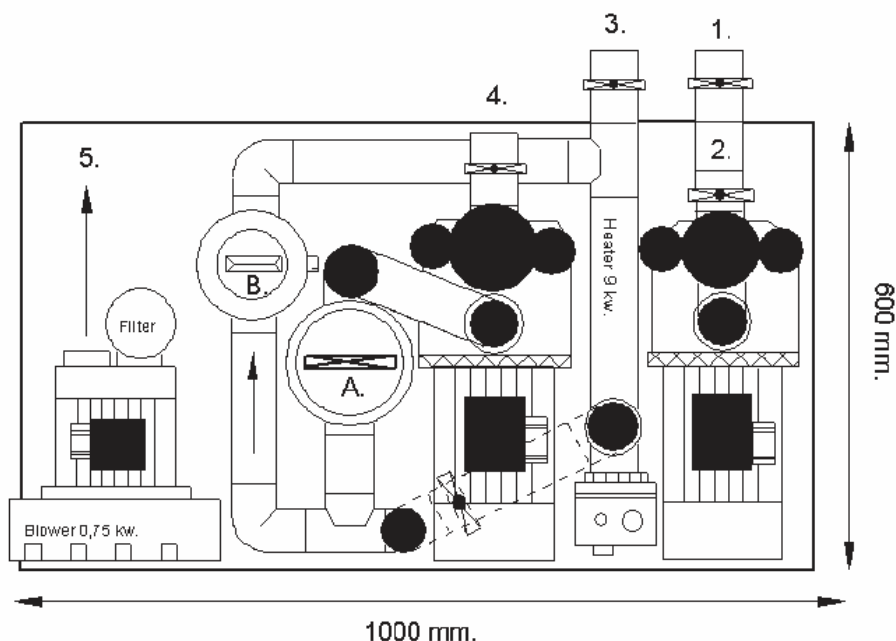

### Type 46-100200 complete, contains following

Volt	1 main cable 400V 2N volt. 16 amp 1 main cable 400 volt. 16 amp (Heater)
Filterpump	230 volt. 0,38 kW. 10m <sup>3</sup> /hour
Heater	400 volt. 9,0 kW. Protected with pressostat and hi-limit
Cartridge filter	Cartridge filter 6,9 m <sup>2</sup>
Blower	230 volt. 0,75 kW. Side channel type, with air filter
Hydro-jet pump	230 volt. 1,10 kW
Spa transformer	230/12 volt. 60 AC
Chlorinator	Adjustable in-line chlorinator for tablets
Image® Pool control	Digital remote control for heater. Filtration on-off, water level + all safety systems
3-function control	Digital stand-up model for hydro-jet pump, blower and spa light Digital temperature reading
Measurement in mm.	Length 1,70 m, Width 0,80 m, Height 1,0 m

The Welldana® Spa unit are mounted on a strong steel frame.  
All electrical items are wired up, and the unit are preplumbed.  
The control boxes are mounted on a plate, ready for wall mounting.  
All prepared for an external spa installation.