


WELLDANA® PUBLIC SPA UNITS

WELLDANA® UNIT - COMMERCIAL

Welldana® Spa unit for spa with gutter. For commercial use.
 Rate of turnover time, not lower than 0,10 hour, at 2100 litre water.
 Designed for use at **6 persons per hour**.
 For spas up to 2100 liter water. (6 - 8 big jets)

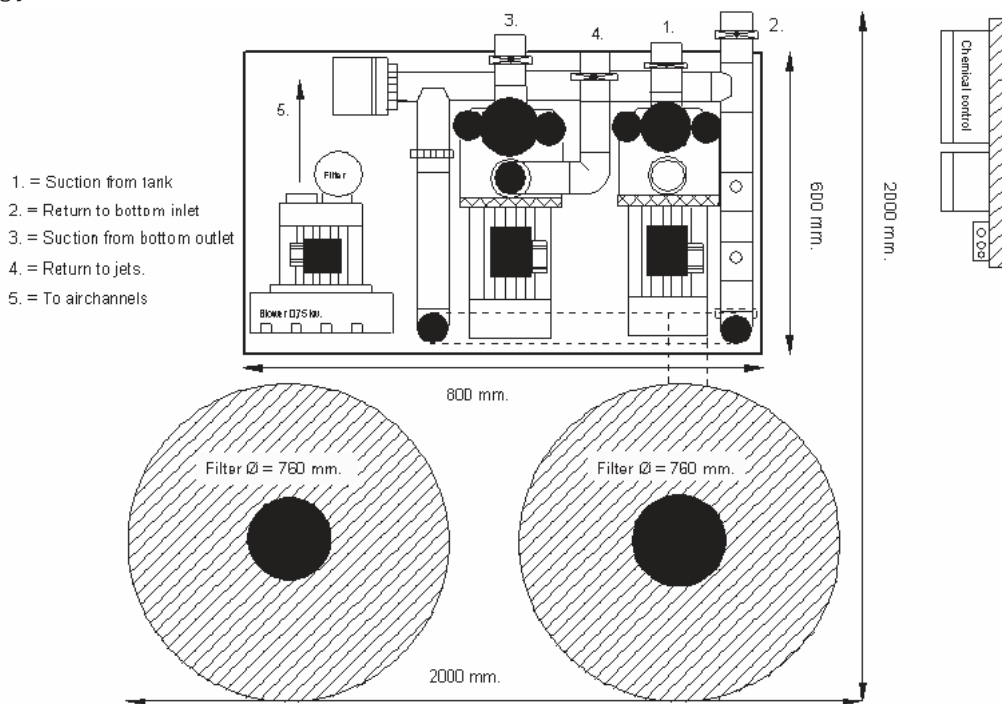

Welldana® units are dimensioned after the present DIN standards but local authorities may have different installation requirements.

External motor protections, timer function and fittings needed to connect the unit and balancetank with the spa are **not** included.

Type 46-100300 complete, contains following		Part number
Filterpump	1,13 kW. 230 volt 19,7 m ³	36-202113
Sand filter	2 x 0,45 m ² . D 760 mm. 2 pcs. (With valves)	45-240760
Hydro jetpump	1,13 kW. 230 volt 19,7 m ³	36-202113
Blower	0,75 kW. 230 volt. Side channel type with airfilter	66-112075
Heater	9 kW. 400 volt. With hi-limit. Protected with pressostat and hi-limit	34-110409
Spa transformer	230/12 volt. 60 VA	64-350148
Balance tank	1100 l. With manhole. (extern mounting)	65-301100
Chemical tanks	2 x 60 L. (external mounting)	30-601060
Chemical pumps	2 x 1 L. 230 volt. (external mounting)	30-601011
Chemical control	pH and free chlorine. Digital LCD & LED display. Complete with flowcell	30-203100
Image® Poolcontrol	Digital remote control for heat control. Digatal temperature display. Filtration water level + all safety systems	34-015040/34-015041
3-function control	For hydro-jet pump, blower and spa light. Round touch model	64-107030/64-107213
Measurement in m	Length 2,0 m. Width 2,0 m. Height 2,30 m	
Volt	1 main cable 400V 2N volt. 16 amp 1 main cable 400 volt. 16 amp. (Heater)	

The Welldana® Spa unit are mounted on a strong steel frame.
 All electrical items are wired up, and the unit are preplumbed.
 The control boxes are mounted on a plate, ready for wall mounting.
 All prepared for an external spa installation.