

MaxFlo XL™

YEARS OF WARRANTY



Simplicity

- ➔ Optimised design and hydraulics
- ➔ Quarter-turn opening cover for easy maintenance
- ➔ Union fittings provided for easy installation
- ➔ Suitable for all types of pool up to 80 m³



EXPERT LINE






Easy-to-service design provides simple installation



See-through strainer cover



Drain plugs for an easy wintering

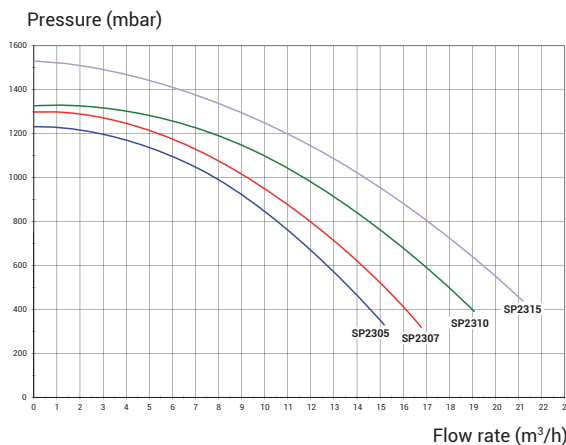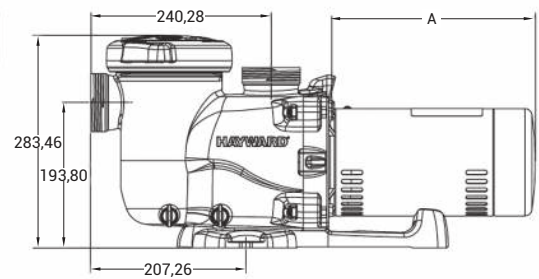

SINGLE PHASE
MAXFLO XL™

THREE PHASE
MAXFLO XL™

Type	Dim. A	Weight	I/O	Flow rate*	Input Power P ₁	Output Power P ₂	Amperage	Item	
SINGLE PHASE MAXFLO XL™	1/2 HP	220 mm	12.9 kg	50 mm	10.5 m ³ /h	640 W	430 W	3 A	SP2305XE81
	3/4 HP	220 mm	12.9 kg	50 mm	12 m ³ /h	640 W	430 W	3 A	SP2307XE111
	1 HP	247 mm	13.9 kg	50 mm	14.5 m ³ /h	975 W	720 W	4.3 A	SP2310XE161
	1.5 HP	247 mm	14.07 kg	50/63 mm	17 m ³ /h	1100 W	790 W	5 A	SP2315XE221
THREE PHASE MAXFLO XL™	3/4 HP	216 mm	11.4 kg	50 mm	12.8 m ³ /h	640 W	430 W	2.1/1.2 A	SP2307XE113
	1 HP	216 mm	12.02 kg	50 mm	14.5 m ³ /h	975 W	690 W	3/1.7 A	SP2310XE163
	1.5 HP	247 mm	13.2 kg	50/63 mm	16.2 m ³ /h	900 W	750 W	2.8/1.6 A	SP2315XE223

* under 8 m water column pressure

