


External display



General information

External display will allow you to monitor the pool condition in remote area, instead of directly on the ASIN Aqua. You can run filter backwash setup required values and state of the filtration. Display is made from stainless-steel and glass for the best impression of look and touch. It is possible to connect the display to all ASIN Aqua devices (except PROFi).

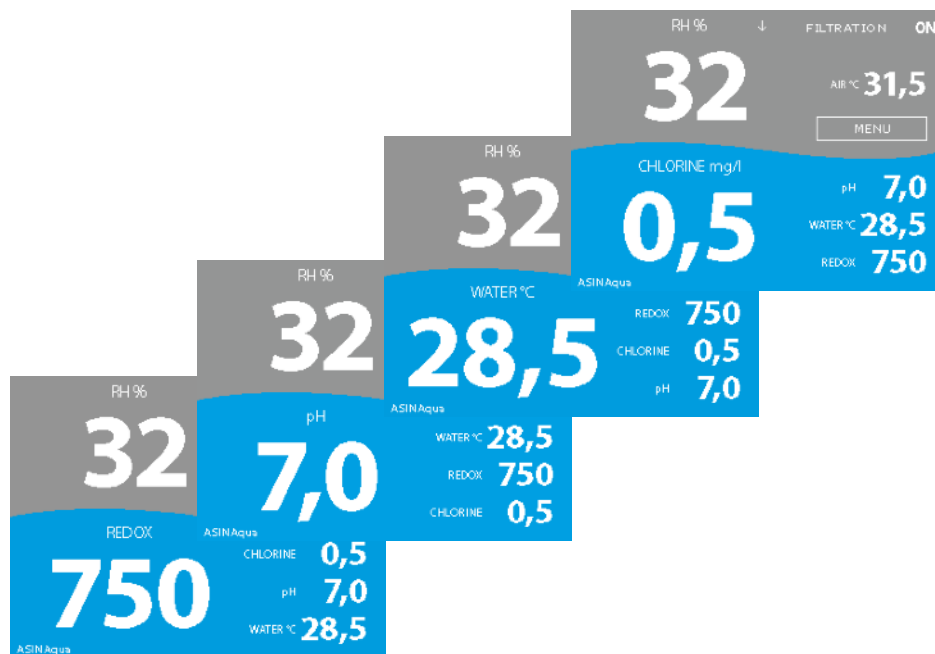

Lower part of the display can show informations about water temperature, pH, Redox or Chlorine



Filter backwash on/off



DOSING OFF
!

FILTRATION PUMP

ON ☒
 OFF ☐
 AUTO ☐

FILTER BACKWASH

START

REQUIRED VALUES

CALIBRATION

CONTROL
back

FILTRATION PUMP

ON ☐
 OFF ☐
 AUTO ☒

FILTER BACKWASH

START

REQUIRED VALUES

CALIBRATION

State of the filtration ON/OFF and Auto.
Once you turn OFF the filtration, the dosing will be switched off.

REQUIRED VALUES
back

DESINFECTION

pH

WATER TEMPERATURE

SANOSIL ml/m³ day

10

-

REQUIRED VALUES
back

DESINFECTION

pH

WATER TEMPERATURE

DOSE ml/m³ hour

3

-

REQUIRED VALUES
back

DESINFECTION

pH

WATER TEMPERATURE



CHLORINE mg/l

0,5


-

+

Setup of required values for SANOSIL, DOSE, CHLORINE, pH and water temperature

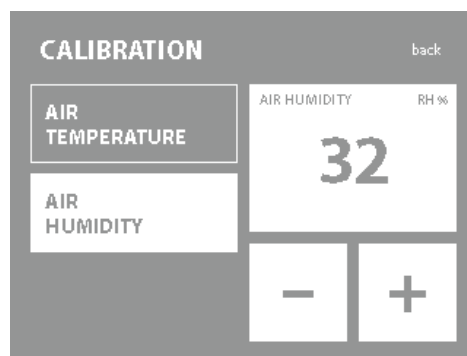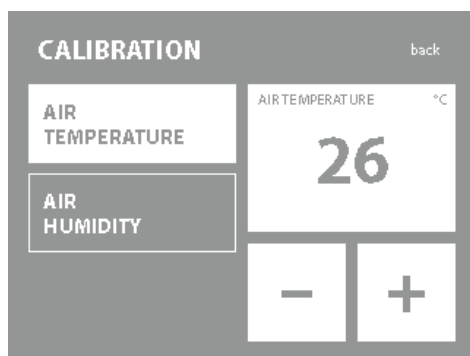


Calibration menu for air temperature and humidity

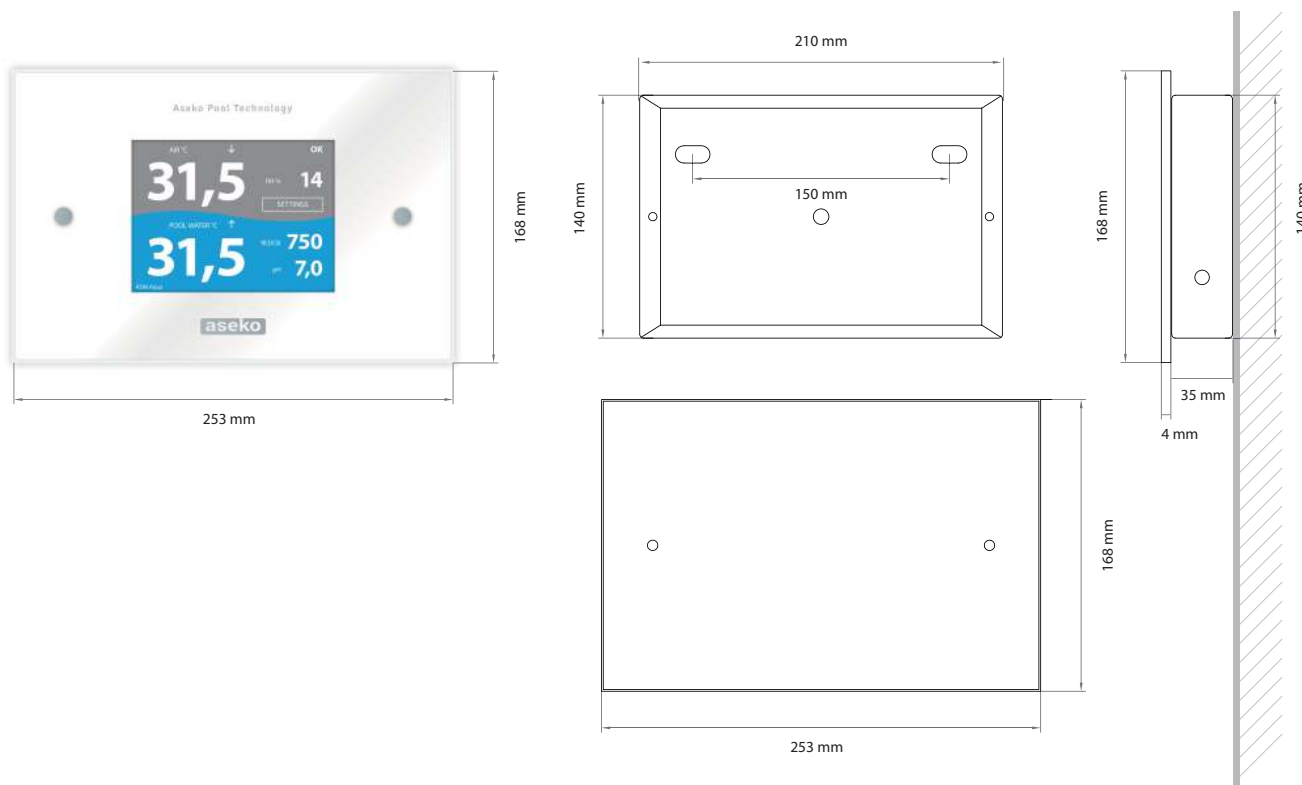

Connection External display

ASIN AQUA Home, Oxygen, Salt

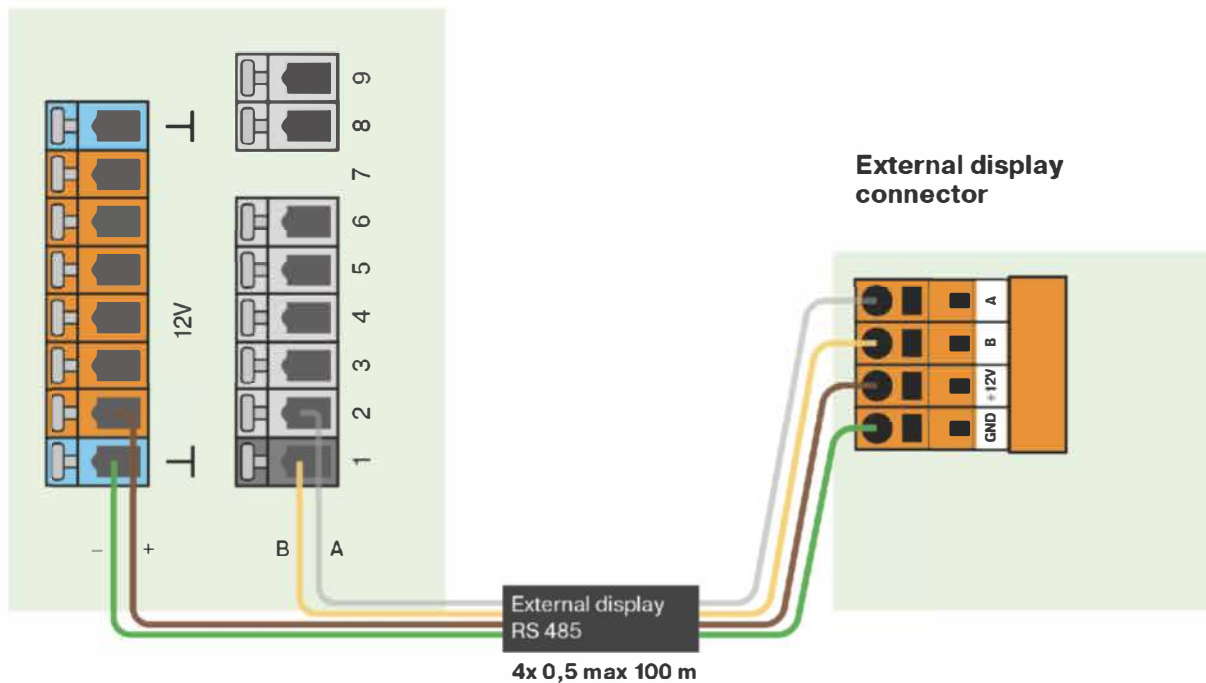

ASIN AQUA Net

