

Ref	ID	Ø D	H	O	M	A	B	I/O	Filt. Surface	AFM® G3 / G2 / G1 (21 Kg) Sand(2-3/0.7-1.2/0.4-0.8)(25 Kg)
212441	DCH/P-415	415	1801	190	305	260	1261	2"	0,13 m ²	0 / 1 / 8
212446	DCH/P-460	460	1812	190	305	260	1272	2"	0,16 m ²	0 / 1 / 10
212452	DCH/P-520	520	1832	190	305	300	1237	2"	0,20 m ²	0 / 1 / 13
212464	DCH/P-640	640	1886	190	355	338	1229	2"	0,30 m ²	0 / 1 / 20
212472	DCH/P-720	720	1985	190	355	405	1275	2"	0,40 m ²	0 / 1 / 26
212484	DCH/P-840	840	2070	190	355	430	1300	2 ½"	0,52 m ²	0 / 2 / 34
212496	DCH/P-960	960	2138	205	420	445	1373	2 ½"	0,70 m ²	0 / 2 / 45
212410	DCH/P-1010	1010	2000	305	420	425	960	DN80	0,78 m ²	0 / 4 / 49
212412	DCH/P-1260	1260	2070	305	420	505	935	DN100	1,21 m ²	0 / 6 / 76



DCH/P SERIES 1200 BED HEIGHT

ADDITIONAL OPTIONS Dimensions in mm.

Design pressure 2,5 Kg/cm² | Test pressure 3,75 Kg/cm².
 Lateral access manhole.
 Nozzle plate steel reinforced filter.
 Complete nozzle plate reliability.
 Internal steel reinforced filter.
 Special diffuser for Sand / AFM®.
 Female threads (GAS) in GRP are part of the body.
 Large diameter internal piping designed for both Sand / AFM® requirements.
 Sight glass.
 DCH/P 1010 & DCH/P 1260 Flanged connections.

Additional sight glass.
 High temperature.
 Available for higher pressure up to 7kg/cm².
 Customizable height.
 Long vertical sight glass.
 A2 & B2 connections available. Ask for measures.
 Flanges available (add price of flanges in [page 22](#))

SIGHT GLASS ALWAYS INCLUDED

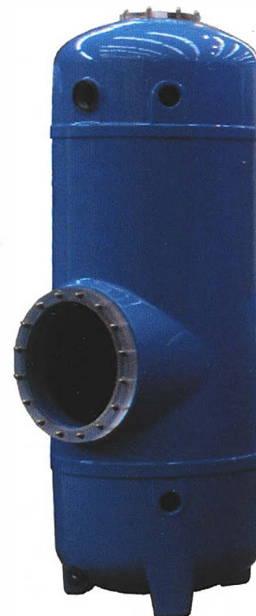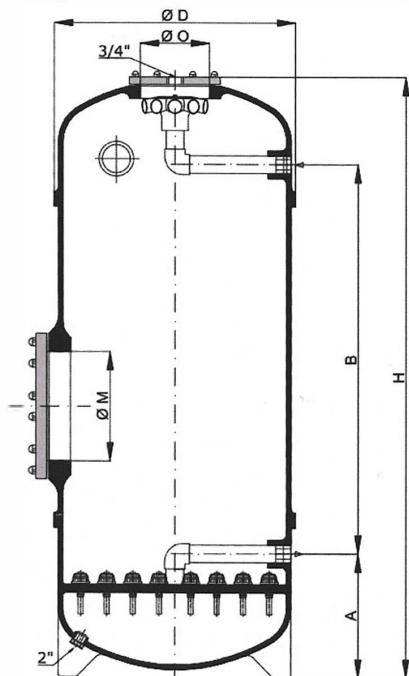

Threaded connections integrated in body Transparent top lid Access manhole Top diffuser Sight glass Nozzle plate Nozzle detail Drain plug

